


# Specifications

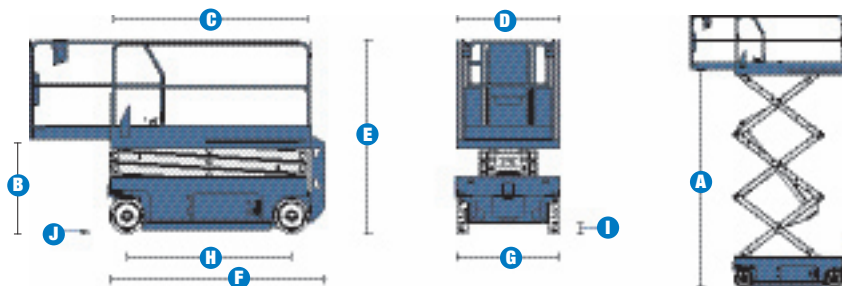

MODELS	GS™-2046		GS™-2646		GS™-3246	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height maximum*	8.10 m	26 ft	9.92 m	32 ft	11.75 m	38 ft
<b>A</b> Platform height maximum	6.10 m	20 ft	7.92 m	26 ft	9.75 m	32 ft
<b>B</b> Platform height stowed	1.04 m	3 ft 4.8 in	1.16 m	3 ft 9.6 in	1.29 m	4 ft 2.75 in
<b>C</b> Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
<b>D</b> Platform width - outside	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in
Guardrail height	-	-	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in
<b>E</b> Height - stowed: folding guardrails	2.13 m	7 ft	2.26 m	7 ft 5 in	2.39 m	7 ft 10 in
rails folded	1.55 m	5 ft 1 in	1.68 m	5 ft 6 in	1.80 m	5 ft 11 in
<b>F</b> Length - stowed	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in
extended	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in
<b>G</b> Width	1.17 m	3 ft 10	1.17 m	3 ft 10	1.17 m	3 ft 10
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>I</b> Ground clearance - centre	10 cm	4 in	10 cm	4 in	10 cm	4 in
<b>J</b> - with pothole guards deployed	1.9 cm	0.75 in	1.9 cm	0.75 in	1.9 cm	0.75 in

PRODUCTIVITY						
Maximum platform occupancy (indoor/outdoor)	2/2	2/2	2/2	2/2	2/1	2/1
Lift capacity	544 kg	1,200 lbs	454 kg	1,000 lbs	318 kg	700 lbs
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%	30%	30%	30%	25%	25%
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
Raise / lower speed	30 / 33 sec	30 / 33 sec	30 / 38 sec	30 / 38 sec	57 / 35 sec	57 / 35 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L	3.75 gal	17 L	4.5 gal

WEIGHT***						
	1,974 kg	4,351 lbs	2,447 kg	5,395 lbs	2,812 kg	6,200 lbs

**STANDARDS COMPLIANCE**

CE EN280, PB-10-611-03

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.  
 \*\*\* Weight will vary depending on options and/or country standards.

# Features

## STANDARD FEATURES

### MEASUREMENTS

#### GS™-2046

- 8.10 m (26 ft) working height
- Up to 544 kg (1,200 lb) lift capacity

#### GS™-2646

- 9.92 m (32 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

#### GS™-3246

- 11.75 m (38 ft) working height
- Up to 318 kg (700 lb) lift capacity

### PRODUCTIVITY

- 2.26 x 1.15 m (7 ft 5 in x 3 ft 9 in) steel platform
- 91 cm (3 ft) extension deck
- Folding guardrails with platform half height swing gate
- Dual front wheel drive
- Universal 20 amp smart charger
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- Onboard diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Drive speed interlock
- Swing-out component tray
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

### POWER

- 24 V DC (four 6 V 225 Ah batteries)



## OPTIONS & ACCESSORIES

### PRODUCTIVITY

- Air line to platform
- Dual flashing beacons
- Motion alarm
- Platform work lights
- Automotive horn

### POWER

- Power inverter
- Maintenance-free batteries

### Distributed By:

### UK

Millennium House  
Brunel Drive  
Newark NG24 2DE  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

### France

10, ZA de la Croix St. Mathieu  
28320 Gallardon  
France  
Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

### Germany

Finienweg 3  
28832 Achim/Bremen  
Germany  
Tel: +49 (0)4202 8852-0  
Fax: +49 (0)4202 8852-25

### Spain

Gaià 31, Pol. Ind. Plá d'en Coll  
08110 Montcada i Reixac  
Barcelona  
Spain  
Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

### Scandinavia

Importgatan 17  
422 46 Hisings Backa  
Sweden  
Tel: +46 31 57 51 00  
Fax: +46 31 57 90 20

### Middle East

Terex Middle East  
PO Box 282325, Dubai  
U.A.E.  
Tel: +971 4 339 1800  
Fax: +971 4 339 1802  
Email: InfoME@terex.com

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, WA  
USA 98073-9730  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

**Email:** AWP-InfoEurope@terex.com

### Distributed By: